


GLOBE RAM

DEMOLITION & CRUSHING EQUIPMENT

Combi demolition unit

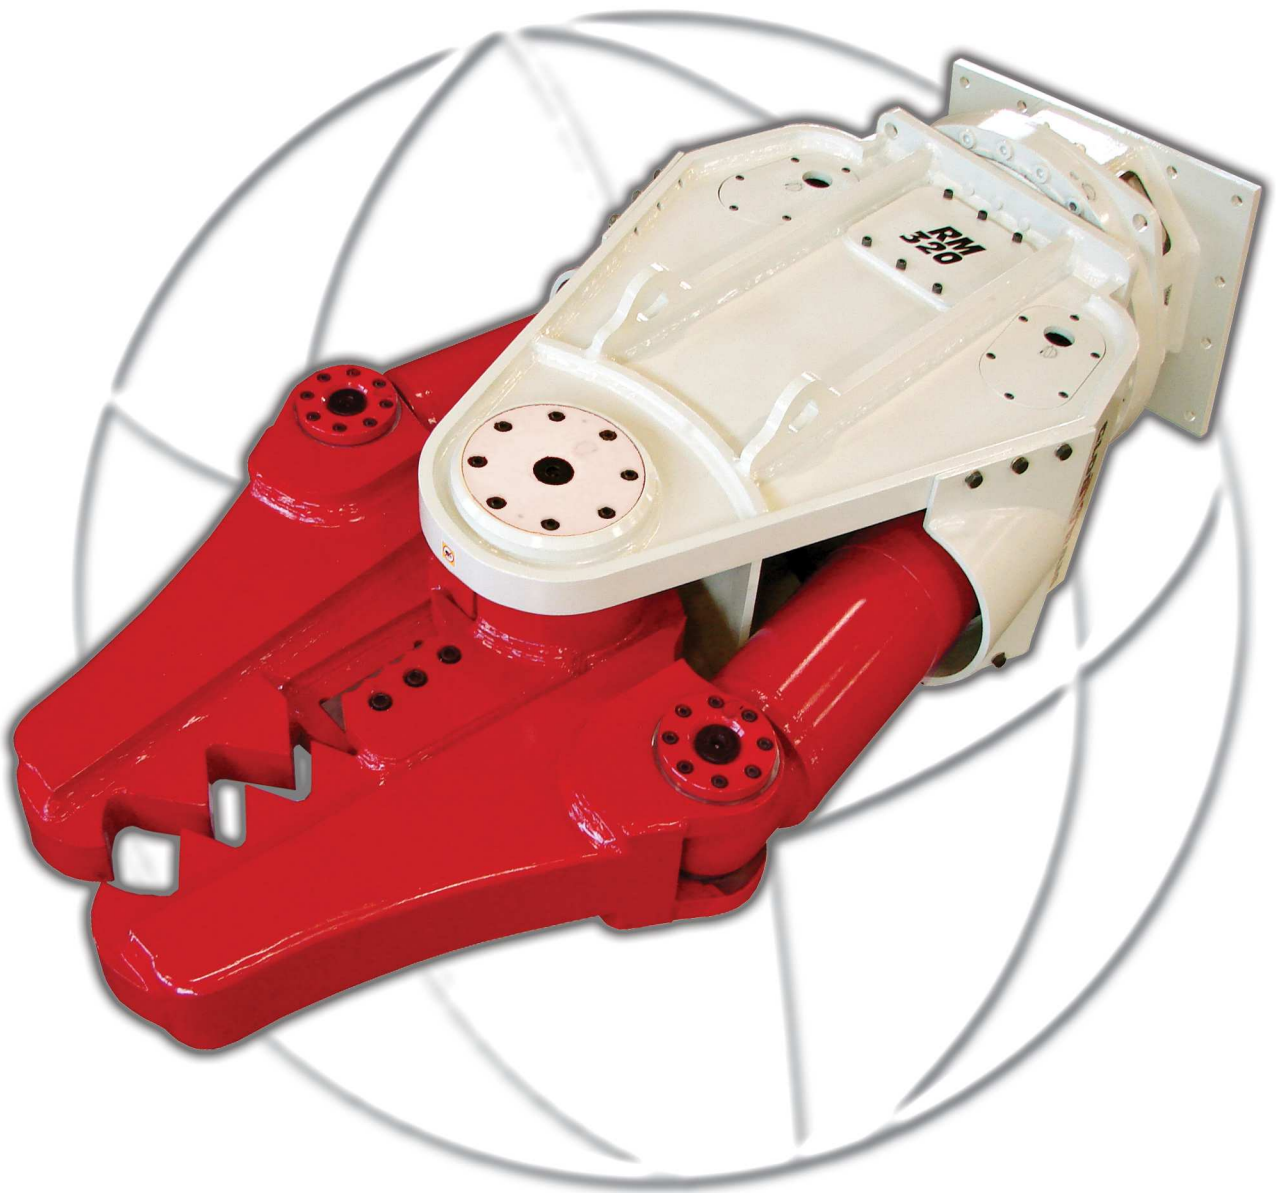

THE CONQUEROR OF EVERY ROCK

www.globram.com

Combi demolition unit

360°

Specifications		RM 320		RM 330	
Working weight (incl. bracket)	Demolition jaw version	1960 4320	kg lbs	2590 5710	kg lbs
	Steel cutter jaw version	2080 4590	kg lbs	2700 5950	kg lbs
	Pulverizer jaw version	1970 4340	kg lbs	2500 5510	kg lbs
Max. oil flow / open-close		250 66	l/min gpm	250 66	l/min gpm
Max. operating pressure / open-close		350 5080	bar psi	350 5080	bar psi
Max. oil flow / rotation		20 5,3	l/min gpm	20 5,3	l/min gpm
Max. operating pressure / rotation		150 2180	bar psi	150 2180	bar psi
Max. jaw opening	Demolition jaw version	730 28,7	mm in.	805 31,7	mm in.
	Steel cutter jaw version	380 15,0	mm in.	450 17,7	mm in.
	Pulverizer jaw version	750 29,5	mm in.	800 31,5	mm in.
Cutter blade length	Demolition jaw version	180 7,1	mm in.	180 7,1	mm in.
	Steel cutter jaw version	480 18,9	mm in.	720 28,3	mm in.
	Pulverizer jaw version	180 7,1	mm in.	180 7,1	mm in.
Overall length (excl. bracket)	Demolition jaw version	2170 85,4	mm in.	2350 92,5	mm in.
	Steel cutter jaw version	2200 86,6	mm in.	2310 90,9	mm in.
	Pulverizer jaw version	2200 86,6	mm in.	2310 90,9	mm in.
Cycle time		3,7 - 5,6 3,7 - 5,6	s sec.	5,3 - 7,2 5,3 - 7,2	s sec.
Max crushing force	Demolition jaw version	200 220	t tons	250 276	t tons
	Steel cutter jaw version	200 220	t tons	250 276	t tons
	Pulverizer jaw version	200 220	t tons	250 276	t tons
Advised carrier weight		19 - 27 21 - 30	t tons	23 - 35 25 - 39	t tons